

CONTROL DAMPERS



CD-42

- Single and opposed blade action available.
- 6" x 16 gauge galvanized steel blades.
- 1/2" dia. hex plated steel blade shafts.
- In-jamb linkage.
- Standard nylon bushings.
- 1/2" round x 6" drive axle with bearing.
- Dampers supplied 1/4" undersized.
- Optional electric and pneumatic actuators in stock (see accessory reference.)
- Optional manual locking quadrant (see accessory reference.)

Size	Stock#	List Price
6" x 6"	W-11917	\$81.00
8" x 8"	W-11918	\$81.00
10" x 10"	W-11919	\$95.00
12" x 12"	W-11920	\$95.00
14" x 14"	W-11921	\$123.00
16" x 16"	W-11922	\$123.00
18" x 18"	W-11923	\$155.00
20" x 20"	W-11924	\$155.00
22" x 22"	W-11925	\$192.00
24" x 24"	W-11926	\$192.00



CD-10R

- 6" x 22 gauge sleeve and frame, double beaded for strength.
- Easy duct connection.
- 22 gauge galvanized blade with center "V".
- 3/8" square zinc plated shafts with tight sealing nylon bushings.
- Manual locking quadrant standard with 1-1/2" stand-off bracket.
- No rattles.

Size	Stock#	List Price
6"	W-11879	\$60.00
7"	W-12392	\$64.00
8"	W-11880	\$64.00
9"	W-12393	\$70.00
10"	W-11881	\$70.00
12"	W-11882	\$76.00
14"	W-11883	\$87.00
16"	W-11884	\$93.00
18"	W-11885	\$108.00
20"	W-11886	\$121.00
22"	W-11887	\$135.00
24"	W-11888	\$151.00




CD-25R

- 12" x 20" gauge galvanized steel sleeve.
- Double beaded for strength and easy duct connection.
- Double membrane steel blade (14 ga. equivalent).
- Polyethylene blade gasket provides full diameter seal.
- 1/2" round diameter steel blade shafts.
- Leakage less than 1% at 2" of static pressure.
- Maintains seal at 4" of static pressure.
- Optional electric and pneumatic actuators in stock.
- Optional manual locking quadrant (see accessory reference.)

Size	Stock#	List Price
6"	W-11889	\$109.00
8"	W-11890	\$115.00
10"	W-11891	\$125.00
12"	W-11892	\$135.00
14"	W-11893	\$147.00
16"	W-11894	\$158.00
18"	W-11895	\$170.00
20"	W-11896	\$188.00
22"	W-11897	\$214.00
24"	W-11898	\$234.00

RCS-10R

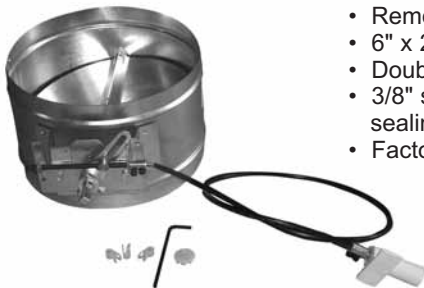

- Remote controlled cable operated balancing damper.
- 6" x 22 gauge galvanized steel frame and sleeve.
- Double beaded for strength.
- 3/8" square zinc plated steel blade shafts with tight sealing nylon bushings.
- Factory assembled (no field assembly required.)
 - Includes 36" cable and remote operator (as shown below) (longer lengths available.)

Size	Stock#	List Price
6"	W-12380	\$162.00
7"	W-12381	\$162.00
8"	W-12382	\$166.00
9"	W-12383	\$166.00
10"	W-12384	\$172.00
12"	W-12385	\$178.00
14"	W-12386	\$190.00
16"	W-12387	\$196.00
18"	W-12388	\$212.00
20"	W-12389	\$224.00
22"	W-12390	\$237.00
24"	W-12391	\$253.00
Field Mt. Kit	W-12395	\$142.00
Extra Cable	W-12377	\$3.00/FT
Ex. Insulation	W-12378	*



RCS-10R Field Mounting Kit

- Control arm/screw assembly - mounted on standoff bracket.
- Standard 36" long cable included (optional cable lengths available.)
- Allen key remote control assembly can be provided loose for use with almost any balancing damper.
- Standard 15/16" O.D. provides unobtrusive opening in ceiling or wall for architectural requirements.

* Included with W-12377

Accessory Reference



Damper Accessories - pg. 9



Actuators - pg. 10-11



Quick Ship Program - pg. 2-3